




# PV580 Series Solar Pump Inverter



**FRECON ELECTRIC (SHENZHEN) CO.,LTD**  
 Add : 2nd, No.3 Zhenbao Industrial Zone, No.137 Shiyan Road, Shiyan Street, Baoan District Shenzhen, China  
 Tel : 0755-88605930  
 Fax : 0755-88606072  
[E-Mail:overseas@frecon.com.cn](mailto:overseas@frecon.com.cn)  
[Web:www.frecon.com.cn](http://www.frecon.com.cn)

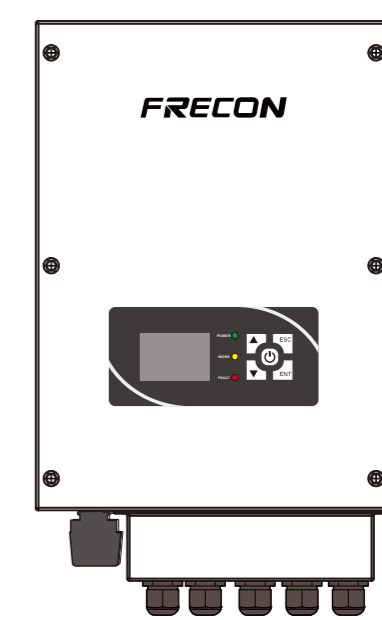


Website FaceBook

202012(V1.0)



FRECON ELECTRIC (SHENZHEN) CO.,LTD.

**Solar Pump System Diagram**

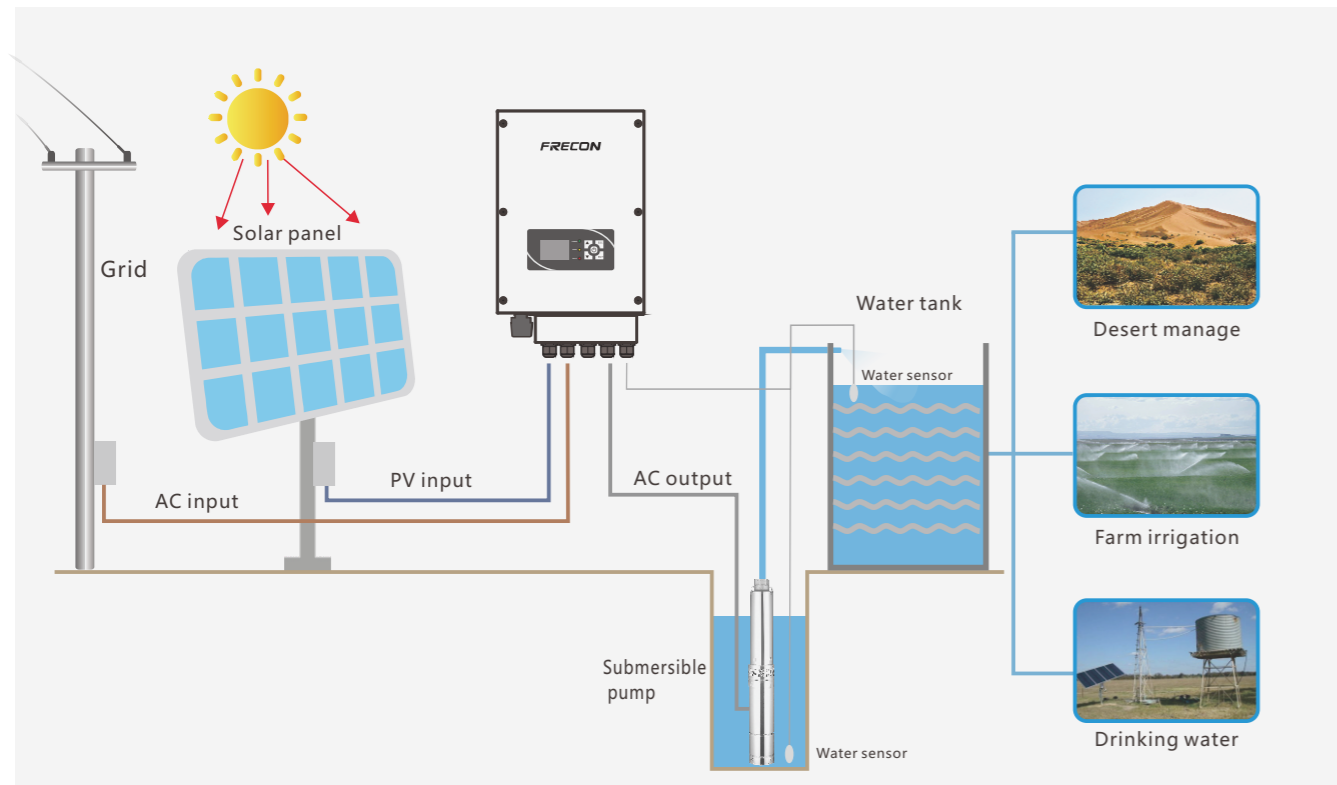

**Features**

- ▶ Fashion design, easy operation
- ▶ Widely used in various AC asynchronous and synchronous pumps
- ▶ IP65 design, outdoor installation
- ▶ Compatible with DC / AC power input
- ▶ Optimized MPPT algorithm, efficiency > 99%
- ▶ Operating temperature range: - 25 ~ 60 °C
- ▶ Natural cooling method, low noise
- ▶ All models can be configured with GPRS module ( Optional ) for real-time remote monitoring and operation in mobile APP
- ▶ Excellent performance, large water yield
- ▶ Supports over-voltage, phase loss, short circuit, over-temperature and etc. protection
- ▶ Models below 2.2kW are built-in DC boost module for lower DC voltage input to reduce quantity of solar panel

**Technical Parameters**

Model	PV580-2S-0.4	PV580-2S-0.7	PV580-2S-1.5	PV580-2S-2.2
<b>PV Input</b>				
DC Max Input Voltage	450V			
Recommended MTTP Voltage	100V-400V			
DC Max Input Current	15A	15A	30A	30A
Max MPPT Efficiency	>99%			
Number of string	1			
<b>AC/DC Input</b>				
Voltage	200-260Vac(3PH)			
Frequency	50Hz/60Hz(±3%)			
<b>AC Output</b>				
Max Motor Output	0.4kW	0.7kW	1.5kW	2.2kW
Rated Output Voltage	220/230Vac(1PH or 3PH)			
Output Frequency Range	0-50/60Hz			
Rated Output Current	4.2A	7.5A	10.5A	17A
<b>System</b>				
Protection Grade	IP65			
Operating Temperature	-25-60°C			
Cooling Way	Natural cooling			
Display	LCD			
Communication	RS485,GPRS(Optional)			
Altitude	3000m, above 3000m need derate operating			
Noise Emission	<50dB			
Compliance	EN50178,IEC/EN62109-1,IEC61800			
Dimension	280*400*148(W*H*D, mm)			
Package Dimension	280*400*148(W*H*D, mm)			
Net Weight /Gross Weight	N/A			

Technical Parameters

Model	PV580-4T-2.2	PV580-4T-4.0	Pv580-4T-5.5	PV580-4T-7.5
PV Input				
DC Max Input Voltage	900V			
Recommended MTTP Voltage	450V-850V			
DC Max Input Current	15A	15A	30A	30A
Max MPPT Efficiency	>99%			
Number of string	1			
AC/DC Input				
Voltage	360-460Vac(3PH)			
Frequency	50Hz/60Hz(±3%)			
AC Output				
Max Motor Output	2.2kW	4.0kW	5.5kW	7.5kW
Rated Output Voltage	380-460Vac(3PH)			
Output Frequency Range	0-50/60Hz			
Rated Output Current	5.5A	9.5A	13A	17A
System				
Protection Grade	IP65			
Operating Temperature	-25-60°C			
Cooling Way	Natural cooling			
Display	LCD			
Communication	RS485/GPRS			
Altitude	3000m, above 3000m need derate operating			
Noise Emission	<50dB			
Compliance	EN50178,IEC/EN62109-1,IEC61800			
Dimension	280*400*148(W*H*D, mm)			
Package Dimension	280*400*148(W*H*D, mm)			
Net Weight /Gross Weight	N/A			

Technical Parameters

Model	PV580-4T-011	PV580-4T-015	PV580-4T-018	PV580-4T-022	PV580-4T-030	PV580-4T-037	PV580-4T-045	PV580-4T-055
PV Input								
DC Max Input Voltage	900V							
Recommended MPPT Voltage	450V-850V							
DC Max Input Current	37A	48A	55A	67A	90A	112A	136A	168A
Max. MPPT Efficiency	>99%							
Number of String	1							
AC/DC Input								
Voltage	360-460Vac(3PH)							
Frequency	50Hz/60Hz(±3%)							
AC Output								
Max. Motor Output	11kW	15kW	18.5kW	22kW	30kW	37kW	45kW	55kW
Rated Output Voltage	380-460Vac(3PH)							
Output Frequency Range	0-50/60Hz							
Rated Output Current	25A	32A	37A	45A	60A	75A	91A	112A
System								
Protection Grade	IP65							
Operating Temperature	-25-60°C							
Cooling Way	Natural cooling							
Display	LCD							
Communication	RS485/GPRS							
Altitude	3000m, above 3000m need derate operating							
Noise Emission	<50dB							
Compliance	EN50178,IEC/EN62109-1,IEC61800							
Dimension	360*550*190(W*H*D,mm)				405*585*250(W*H*D,mm)			
Package	360*550*190(W*H*D,mm)				405*585*250(W*H*D,mm)			
Net Weight /Gross Weight	N/A							